

# SIN – Safety switch with separated actuator and guard locking



## Applications

- Personnel protection on machines with dangerous machine parts which move after switching off
- Locking of a machine or an automatic process when the guard is open
- Position monitoring of guard and guard locking

## Features

- Suitable for locking devices in accordance with EN 14119
- Flexible use with 4 horizontal or 4 vertical actuating directions
- Integrated protection against simple bypassing
- Long service life thanks to dust- and water-proof housing and a broad operating temperature range of up to 70°C
- Locking force 1,500 N

## Function

The mechanical safety switches in the SIN series are suitable for the secure locking (guard locking) of safety doors until a hazardous machine process has ended.

The safety switches have two independent contact blocks which reflect the position of the actuator on the one hand and the position of the guard locking on the other.

The release of the entry or a shutdown of the machine in case of danger is done by evaluating the contact blocks by a suitable basic device **safe** RELAY or through the **samos**<sup>®</sup> or **samos**<sup>®</sup>PRO safety systems.

## Spring-actuated locking

The safety switch on the guard is locked automatically when the actuator reaches its end position.

The guard is unlocked by applying a current to the internal electromagnets in the safety switch.

## Magnet-actuated locking


The safety switch on the guard is locked when the actuator reaches its end position by applying a current to the internal electromagnet.

When the current to the internal electromagnet is switched off, the guard locking is released and the guard can be opened.

## Versatile installation

Thanks to the adjustable actuator head and the large selection of actuators, the safety switch can be used to implement guard locking devices for all applications in machine construction.

Universal use through 8 different actuating directions and 5 different actuators:

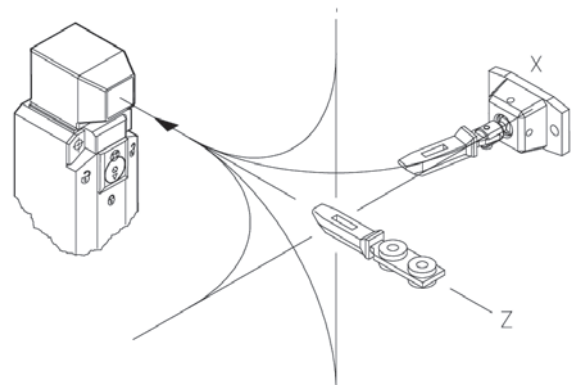


# SIN – Safety switch with separated actuator and guard locking

## Technical data

<b>Function</b>	
according EN 14119	Safety switch with separated actuator and guard locking
<b>Power supply circuit</b>	
Rated voltage	24 V AC/DC, 110/230 V AC
Continuous output	4.4 VA (SIN 12xx: 8 VA)
<b>Output circuit</b>	
Contact load of conv. thermal current $I_{th}$	5 A
Application category	AC-15: $U_e$ 230V, $I_e$ 2,5 A
Mechanical life	1 x 10 <sup>6</sup> switching cycles (max. 600 switching cyclesh)
Short-circuit protection	lead fuse 4 A class gL
<b>Mechanical data</b>	
Guard locking force	1500 Nm
Extraction force	> 27 Nm
Approach speed	max. 0,5 m/s
Dimensions (L x W x H)	170 x 42.5 x 51 mm
Mounting	4 x M5
Cable entry point	3 x M20 x 1,5
<b>General data</b>	
Ambient temperature	-25 - +70 °C
Wire ranges push-in terminals	1 x 0.5 -1.5 mm <sup>2</sup>
Protection degree according to EN 60529	IP 67
Weight	0,35 kg
Standards	EN 60947-1, EN 60947-5-1, EN ISO 13849-1, EN 62061
Approvals	DEGUV, c-CSA-us, CCC

# SIN – Safety switch with separated actuator and guard locking

## Dimensions diagramm

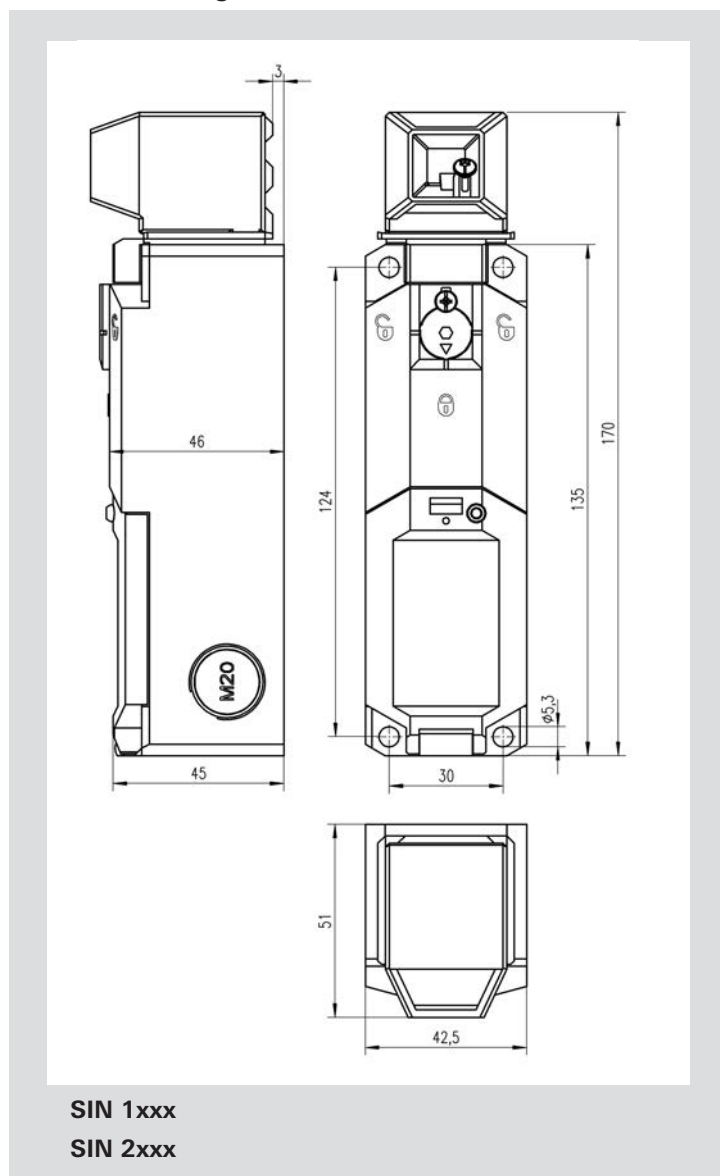


## Overview of devices | part numbers safety switch

Type *	Locking principle	Contact assignment (actuator + guard locking)	Rated voltage	Additional features	Part. no.	P.U.
SIN 1120	Spring-actuated	2NC + 2NC	24 V AC/DC	Auxiliary release	R1.310.1120.0	1
SIN 1150	Spring-actuated	1NC/1NO + 1NC/1NO	24 V AC/DC	Auxiliary release	R1.310.1150.0	1
SIN 1130	Spring-actuated	2NC + 1NC/1NO	24 V AC/DC	Auxiliary release	R1.310.1130.0	1
SIN 1330	Spring-actuated	2NC + 1NC/1NO	24 V AC/DC	Auxiliary release, LED	R1.310.1330.0	1
SIN 1350	Spring-actuated	1NC/1NO + 1NC/1NO	24 V AC/DC	Auxiliary release, LED	R1.310.1350.0	1
SIN 1220	Spring-actuated	2NC + 2NC	110/230 V AC	Auxiliary release	R1.310.1220.0	1
SIN 1250	Spring-actuated	1NC/1NO + 1NC/1NO	110/230 V AC	Auxiliary release	R1.310.1250.0	1
SIN 1230	Spring-actuated	2NC + 1NC/1NO	110/230 V AC	Auxiliary release	R1.310.1230.0	1
SIN 2120	Magnet-actuated	2NC + 2NC	24 V AC/DC		R1.310.2120.0	1
SIN 2150	Magnet-actuated	1NC/1NO + 1NC/1NO	24 V AC/DC		R1.310.2150.0	1
SIN 2130	Magnet-actuated	2NC + 1NC/1NO	24 V AC/DC		R1.310.2130.0	1
SIN 2220	Magnet-actuated	2NC + 2NC	110/230 V AC		R1.310.2220.0	1
SIN 2250	Magnet-actuated	1NC/1NO + 1NC/1NO	110/230 V AC		R1.310.2250.0	1
SIN 2230	Magnet-actuated	2NC + 1NC/1NO	110/230 V AC		R1.310.2230.0	1


\* the associated actuator must be ordered separately

# SIN – Actuator


## Dimensions diagramm

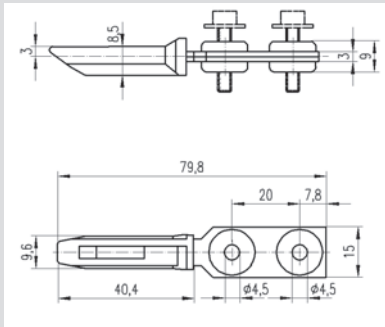


SIN 9001

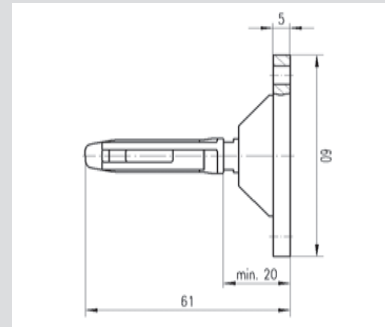


SIN 9004

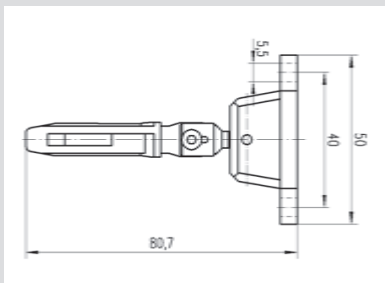

SIN 9002

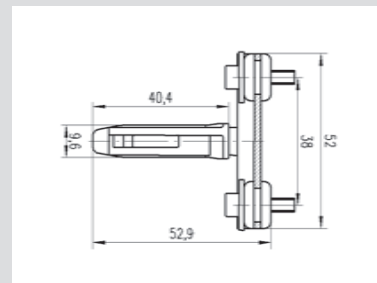

SIN 9005

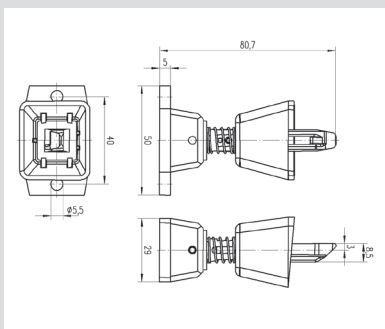

SIN 9003

### Approach Radii

SIN 9001, 9003, 9005: R min > 400mm

SIN 9004 R min > 350mm

SIN 9002 R min > 150mm

## Overview of devices | part numbers Actuator

Type	Actuator	Part. no.	P.U.
SIN 9001	Standard actuator	R1.310.9001.0	1
SIN 9002	Radius actuator	R1.310.9002.0	1
SIN 9003	Radius actuator with dust protection	R1.310.9003.0	1
SIN 9004	Actuator, flexible	R1.310.9004.0	1
SIN 9005	Actuator, transverse	R1.310.9005.0	1

## SMS – Safety switch with separated actuator



SMS 4xxx



SMS 3xxx



### Applications

- Access protection for operators of machines with dangerous machine parts which move after switching off
- Locking of a machine or an automatic process when the guard is open
- Position monitoring of movable guards in accordance with EN 60947-5-3

### Features


- Flexible use with 2 horizontal or 2 vertical actuating directions
- Protection against simple bypassing in accordance with EN 14119 through multiple coding of the actuator
- Long service life thanks to dust- and water-proof housing and a broad operating temperature range of up to 80 °C.
- Increased extraction force up to 30 N
- Easy installation with adjustment via slots and final fixing via round holes

### Function

The mechanical safety switches in the SMS 2000, SMS 3000 and SMS 4000 series are suitable for the reliable position monitoring of movable guards (EN 60947-5-3).

If the associated guard on the machine is opened, the hazardous machine movement is switched off.

The machine is shut down in a hazardous situation by an analysis of the contacts carried out by a suitable basic device in the **safe** RELAY or by one of the **samos**® or **samos**®PRO safety systems.

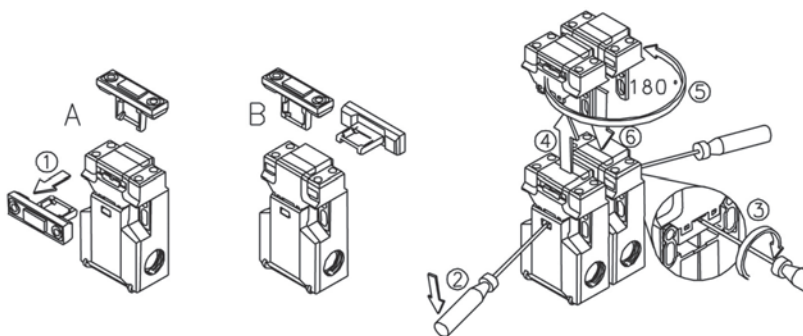

Simple installation and wiring in each application.

# SMS – Safety switch with separated actuator



SMS 2xxx



## Applications

- Access protection for operators of machines with dangerous machine parts which move after switching off
- Locking of a machine or an automatic process when the guard is open
- Position monitoring of guard and guard locking

## Features


- Flexible use with 4 horizontal or 4 vertical actuating directions
- Slim design for installation on profile systems and where there are difficult space constraints
- Protection against simple bypassing in accordance with EN 1088 through multiple coding of the actuator
- Long service life thanks to dust- and water-proof housing and a broad operating temperature range of up to 80 °C
- Increased extraction force up to 50 N

## Technical data


Function	
according EN 14119	Safety switch with separated actuator
Power supply circuit	
Max. continuous thermal current $I_{th}$	5 A (contact assignment 1 NC or 2 NC/1 NO) 10 A (contact assignment 1 NC/1 NO or 2 NC)
Application category	AC-15: 230 V, 1.5 A (contact assignment 1 NC or 2 NC/1 NO) AC-15: 230 V, 3 A (contact assignment 1 NC/1 NO or 2 NC)
Mechanical life	$1 \times 10^6$
Short-circuit protection	SMS 2xxx / SMS 3xxx lead fuse 6 A class gL/gG SMS 4xxx lead fuse 10 A class gL/gG
Mechanical data	
Approach speed	$\leq 0,2$ m/s
Extraction force	SMS 2xxx 10 N (increased extraction force 50 N) SMS 3xxx / SMS 4xxx 10 N (increased extraction force 30 N)
Dimensions (L x W x H)	SMS 2xxx 100 x 31 x 30,5 mm SMS 3xxx 75 x 52 x 33 mm SMS 4xxx 90 x 52 x 33.5 mm
Mounting	2 x M5
Cable entry point	SMS 2xxx 1 x M20 x 1.5 SMS 3xxx 3 x M16 x 1.5 SMS 4xxx 3 x M20 x 1.5
General data	
Ambient temperature	-30 - +80 °C
Wire ranges screw terminals	1 x 0.5 - 1.5 mm <sup>2</sup>
Protection degree according to EN 60529	IP 65
Weight	0,15 kg
Standards	EN 60947-1, EN 60947-5-1, EN ISO 13849-1, EN 62061
Approvals	TÜV, UL, c-CSA-us

# SMS – Safety switch with separated actuator


## Dimensions diagramm

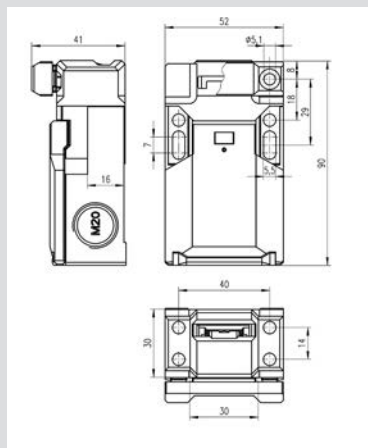

SMS 4xxx

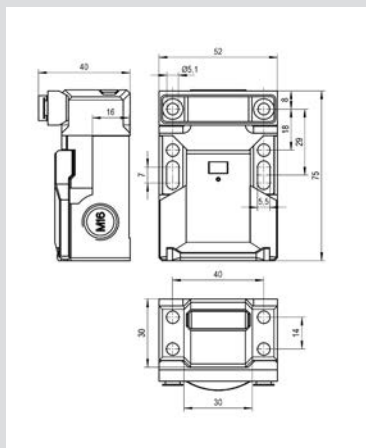

SMS 3xxx

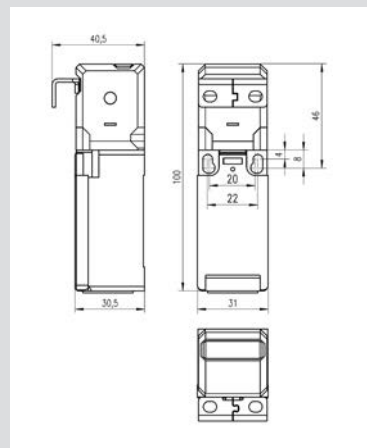

SMS 2xxx

## Overview of devices | part numbers safety switch

Type	Actuator*	Contact assignment	Extraction force	Part no.	P.U.
SMS 3010	Standard actuator	1NC	10 N	R1.320.3010.0	1
SMS 3210	Actuator for increased force	1NC	30 N	R1.320.3210.0	1
SMS 3110	Radius actuator	1NC	10 N	R1.320.3110.0	1
SMS 4040	Standard actuator	1NC/1NO	10 N	R1.320.4040.0	1
SMS 4240	Actuator for increased force	1NC/1NO	30 N	R1.320.4240.0	1
SMS 4140	Radius actuator	1NC/1NO	10 N	R1.320.4140.0	1
SMS 4020	Standard actuator	2NC	10 N	R1.320.4020.0	1
SMS 4220	Actuator for increased force	2NC	30 N	R1.320.4220.0	1
SMS 4120	Radius actuator	2NC	10 N	R1.320.4120.0	1
SMS 4070	Standard actuator	2NC/1NO	10 N	R1.320.4070.0	1
SMS 4270	Actuator for increased force	2NC/1NO	30 N	R1.320.4270.0	1
SMS 4170	Radius actuator	2NC/1NO	10 N	R1.320.4170.0	1
SMS 2040	Standard actuator 2	1NC/1NO	10 N	R1.320.2040.0	1
SMS 2240	Actuator for increased force	1NC/1NO	50 N	R1.320.2240.0	1
SMS 2020	Standard actuator 2	2NC	10 N	R1.320.2020.0	1
SMS 2220	Actuator for increased force	2NC	50 N	R1.320.2220.0	1
SMS 2070	Standard actuator 2	2NC/1NO	10 N	R1.320.2070.0	1
SMS 2270	Actuator for increased force	2NC/1NO	50 N	R1.320.2270.0	1

\* The relevant actuator is included in the scope of delivery


# SMS – Actuator



**SMS 9001**  
(SMS 3xxx / SMS 4xxx included in the scope of delivery)



**SMS 9002**




**SMS 9003**




**SMS 9004**  
(SMS 2xxx included in the scope of delivery)


## Dimensions diagramm

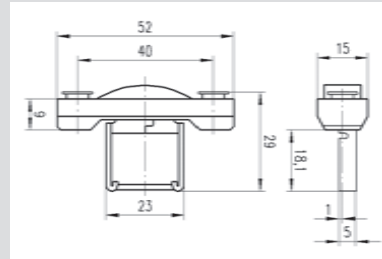


**SMS 9001**

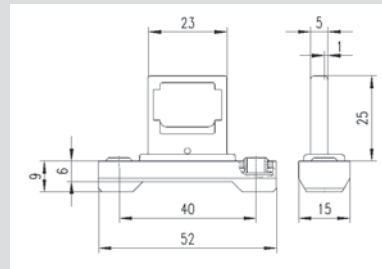

**SMS 9002**

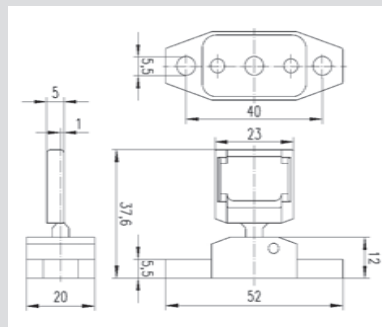

**SMS 9003**



**SMS 9004**

## Overview of devices | part numbers actuator

Type	Actuator	Part no.	P.U.
SMS 9001	Standard actuator	R1.320.9001.0	1
SMS 9002	Actuator for increased force	R1.320.9002.0	1
SMS 9003	Radius actuator	R1.320.9003.0	1
SMS 9004	Standard actuator 2	R1.320.9004.0	1